

Dishwasher — Technical Information

JDB1080AW*, JDB1090AW*, JDB1270AW*, JDB2100AW*, MDB9750AW*, NDB8630AW*, RJDW2480B*, RJDW2481B*, DB5710D*

- Due to possibility of personal injury or property damage, always contact an authorized technician for servicing or repair of this unit.
- Refer to Service Manual 16021814 for detailed installation, operating, testing, troubleshooting, and disassembly instructions



CAUTION

All safety information must be followed as provided in Service Manual 16021814.



WARNING

To avoid risk of electrical shock, personal injury, or death, disconnect power to dishwasher before servicing.

Benefits	JDB1080AW*	JDB1090AW*	JDB1270AW*	JDB2100AW* NDB8630AW*	MDB9750AW*	RJDW2480B* RJDW2481B*
Wash cycles	6	20	6	6	6	4
Heavy Wash	X	X	X	X	X	X
Normal Wash	X	X	X	X	X	X
Quick Wash			X	X	X	
Light Wash	X	X			X	X
Insta Wash						
Auto Clean		X				
Rinse Only	X	X	X	X	X	X
Features						
Sound package	Silent Pack 2000	Silent Pack 2000	Silent Pack 4000	Silent Pack 4000	Quiet Series™ 300 SS	Ultra-Quiet Sound-Silencing System
High Temp Wash	X	X	X	X	X	
Electronic Controls	X	X	X	X	X	
Sanitizer	X	X	X	X	X	
Sensor clean	X	X	X	X	X	
Water Filtration	Micro-Fine Plus Filtration	Micro-Fine Plus Filtration	Micro-Fine Plus Filtration	Micro-Fine Plus Filtration	Micro-Fine Plus Filtration	Micro-Fine Plus Filtration
Delay Start	1-9 Hour Delay Start	1-9 Hour Delay Start	2,4,6 Hour Delay Start	2,4,6 Hour Delay Start	1-9 Hour Delay Start	1-6 Hour Delay Start
Energy Star	X	X	X	X	X	X
Hard Food Disposer	X	X	X	X	X	X
Child lockout	X	X	X	X	X	
Touch Pad Controls	13	12	12	13	13	
Silverware Location	Wash Compartment					
Low rinse aid indicator						


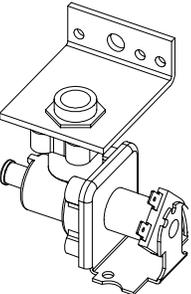

Component Specifications



WARNING

To avoid risk of electrical shock, personal injury, or death, disconnect power to dishwasher before servicing.






Specifications	Value
Power Source	
Voltage AC	120 VAC
Amperage (Single Unit)	15 A
Frequency	60 Hz
Motor horsepower	1/3
Dimensions	
Height–overall	33 ½” to 35 ¼”
Weight	71

Illustration	Component	Test Procedure	Results
	Dishwasher Motor CCW rotation only viewed from shaft end. 1/3HP 120V/60hz, 3.2 amps, 3250 RPM Main Wattage, 285 watts Start Wattage, 1115 watts	Measure resistance from ST5 (Motor Common – blue) to ST8 (Motor Main - yellow) See Component Specifications/Motor Connections for details.	3 to 4 Ω
	Control Panel	See Component Specifications/Membrane Readings for troubleshooting/pin-out instructions.	
	Water valve 120V/60hz, 7 watts 1.13 ± .10 gpm at 20-120 psi	Measure resistance from J6 Pin 4 Aqua (Float switch) to ST4 Black (Common)	1.1 k Ω (This value assumes the float switch is closed).
	Vent wax motor 120V with 1/4" actuation stroke within 90 seconds	Measure resistance from J6 Pin 1 Purple (Vent) to ST4 Black (Common)	1.2 k Ω

Component Specifications

⚠ WARNING

To avoid risk of electrical shock, personal injury, or death, disconnect power to dishwasher before servicing.

Illustration	Component	Test Procedure	Results
	Dispenser wax motor 120V with 1/4" actuation stroke within 90 seconds	Measure resistance from J6 Pin 3 Tan (Dispenser) to ST4 Black (Common)	2 k Ω
	Limit Thermostat	Close on Temperature drop @ 149°F \pm 7°F (Temp) Open on Temperature drop @ 164°F \pm 4°F (Temp)	0 Ω = Closed Infinite Ω = Open
	Sensor/Thermistor	10K Ω \pm 3% at 77°F and 2.4 k Ω \pm 6.5% at 140°F J5 pin 1 - Orange (Temp) to J5 Pin 4 - Red (Neutral)	Infinite Ω = Open 0 Ω = Closed
	Heater/Heating Element 120v/60hz, 650 watts \pm 5% in air, 830 watts \pm 5% in 90°F water	Measure resistance from ST1 Red/Black (Heater) to ST11 White (Common)	16 Ω (This value assumes the high limit thermostat is closed).
	Drain Motor 120v/60hz 45 watts	Measure resistance from ST6 Gray (Drain) to ST4 Black (Common) See section "Motor Connections and Diagram" for wiring contacts.	25 Ω

Component Readings/Testing



WARNING

To avoid risk of electrical shock, personal injury, or death, disconnect power to dishwasher before servicing.

Manual Function Test

A Manual Function Test may be started by pressing the **Normal Wash** key 5 times followed by the **Start** key within 6 seconds.

The **Normal Wash** LED will **Flash** 3 times indicating manual test mode is active. Specific keypads will turn on or off a component as follows:

Heavy Wash	Wash Motor
Normal Wash	Drain Motor
Light Wash	Water Valve
Rinse Only	Soap Dispenser (cycle once)
	Rinse Aid (cycle twice)
Heated Dry	Heating Element

When a component is activated by pressing a specific keypad, the LED above the keypad will be **On**. The test will cancel 120 seconds after the last keypad is pressed. The display (if available) will show '99' until the remaining timeout period is less than 99 seconds. At this point it will countdown until the mode times out, is cancelled, or another key is pressed. To cancel test, press the **Start / Cancel** keypad.

Sales Floor Demo Mode

Press **Extra Rinse** keypad 5 times within 6 seconds. The LED's will illuminate in a progressive order until all are lit. All LED's will stay on for 1 second then all go off simultaneously. The display (if available) will begin at '50' and sequence down to '0' at a 1 second interval and repeat until this mode is terminated. This mode will repeat.

To cancel, press the **Start / Cancel** keypad.

Diagnostic Tips

To check control LED's, enter **Sales Floor Demo Mode**. If control fails to perform as described, replace control. To check control and components, enter **Field Service Test**. If control fails to perform sequence as described, and a fault is detected, determine failure as described in the **Field Service Test**. If a load component failure has been diagnosed, proceed to the **Manual Function Test**. To check individual load components for proper operation, enter **Manual Function Test**. Follow test procedure as described. Repair or replace component as needed.

Note: The **High Current** or **Low Current Motor Error** may be detected during a wash cycle selected by a consumer. If this happens, the control will go into a 30 second auto restart mode and shut down if the unit is not able to restart the motor.

Membrane Readings (All Models)

	Connector	Measure Between
Heavy Wash	J1	Pin 9 - Pin 5
Normal Wash	J1	Pin 9 - Pin 6
Light Wash / China Crystal	J1	Pin 9 - Pin 7
Rinse Only	J1	Pin 9 - Pin 8
Auto Clean / Sensor Clean	J1	Pin 10 - Pin 5
Heated Dry	J1	Pin 11 - Pin 5
Sanitize	J1	Pin 11 - Pin 6
Extra Rinse	J1	Pin 11 - Pin 8

(Front Only Controls)

	Connector	Measure Between
Start / Cancel	J1	Pin 10 - Pin 6
Delay	J1	Pin 10 - Pin 7
Tough Scrub/Super Scrub	J1	Pin 11 - Pin 7
Model ID Jumper *	J1	Pin 12 - Pin 7

An unpressed switch will read as an open circuit.

A pressed switch will read as 10k \square .

* On select models

Field Service Test

A Field Service Test may be started by pressing the **Heavy Wash** key 5 times followed by the **Start** key within 6 seconds. This test must be performed with clean water to insure proper sensor performance.

"88" will appear in the display (if available*) and the following sequence of events will occur:

SECONDS	FUNCTIONS / ACTIVE LOADS
106	Water Valve
5	Thermistor check / Turbidity Sensor check & calibration - no loads active.
120	Wash Motor / Dispenser Wax Motor
180	Wash Motor / Heater
120	Drain Pump
4	Water Valve

The time for the Thermistor check / Turbidity Sensor check & calibration may vary slightly.

The Field Service Test will not repeat. The **Heavy Wash** LED will **Flash** during the test mode. Indicator lights (except **Heavy Wash** and the **Display**) will illuminate per Sales Floor Demo Mode. If the dishwasher door is opened during the test, the test sequence will pause, and resume when the door is closed. To the cancel test, press the **Start / Cancel** keypad.

The control has been designed to test the Sensor Memory and Motor. During the Field Service Test, if a fault has been detected, the test will abort any time after the motor current has been checked and 2 or more LED's will begin to **Flash**. A **Memory / Software Check** will occur immediately after the test is started. The (**See Note****) LED and one of the following:

Turbidity Sensor - failure - **Rinse Only** LED
Thermistor - failure - **Heavy Wash** LED
Motor - high current - **Normal Wash** LED
Motor - low current - **Light Wash** LED
Memory Failure - **Heated Dry** LED

* On select models

** On units with Front Controls only, this will be the **Clean** LED
 On units with Top & Front Controls, this will be the **Delay** LED

Membrane Readings (Front & Top Controls)

	Connector	Measure Between
Quick Wash	J1	Pin 10 - Pin 6
Tough Scrub Plus	J1	Pin 10 - Pin 7
160° Option	J1	Pin 10 - Pin 8
Model ID Jumper *	J1	Pin 12 - Pin 8
Start / Cancel	J3	Pin 9 - Pin 5
Delay	J3	Pin 9 - Pin 6

(Top Only Controls)

	Connector	Measure Between
Quick Wash	J1	Pin 10 - Pin 6
Super Scrub	J1	Pin 10 - Pin 7
160° Option	J1	Pin 10 - Pin 8
Model ID Jumper *	J1	Pin 12 - Pin 6
Start / Cancel	J3	Pin 13 - Pin 12
Delay	J3	Pin 13 - Pin 14

Load Readings

	Measure Between	Result
Heater ¹	ST1 (Heater) - ST11 (Dlb Neutral)	16 \square
Wash Motor	ST5 (Motor Common) - ST8 (Motor Main)	3 to 4 \square
Drain Motor	ST6 (Drain) - ST4 (Dlb Line)	25 \square
Dispenser Wax Motor	J6 Pin 3 (Disp) - ST4 (Dlb Line)	2k \square
Water Valve ²	J6 Pin 4 (Inlt) - ST4 (Dlb Line)	1.1k \square
Thermistor	J5 Pin 1 (Temp) - J5 Pin 4 (Neutral)	See Component Info

Notes:

1. This value assumes the high limit thermostat is closed.
2. This value assumes the float switch is closed.
3. Results are approximated values.

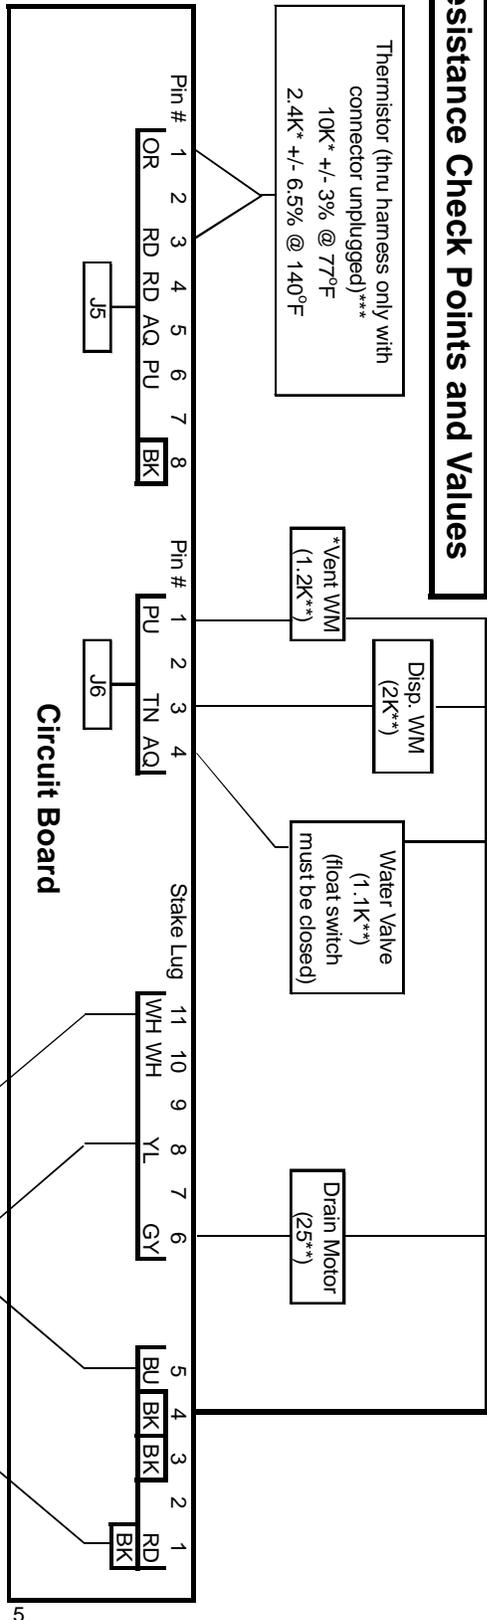
Electrical Diagnostics



WARNING

To avoid risk of electrical shock, personal injury, or death, disconnect power to dishwasher before servicing.

Resistance Check Points and Values



1 Use the "Manual Function Test" as described on the electrical schematic sheet to check components before opening the door to perform continuity testing or replacing parts.

To check continuity from ends of power leads to control board through door switches:

(A white plastic latch must be inserted in the latch assembly for this test.)

2 > With one ohm meter lead connected to the white (neutral) power lead, you should have continuity at stake lugs 10 & 11.
 > With one ohm meter lead connected to the black (line) power lead, you should have continuity at stake lugs 3 & 4, and pin # 8 on connector J5.

3 Perform the resistance checks on the component(s) in question at the locations shown on the chart.

* Select Models Only.

** Nominal value for ohms of electrical resistance of component only. These values will vary slightly due to the additional resistance of the wire harness. Greater variation can occur if the component is still warm from being energized during testing.

*** A resistor in the control board wired in parallel will result in an approximate reading of 4.0 k ohms with connector J5 plugged in.

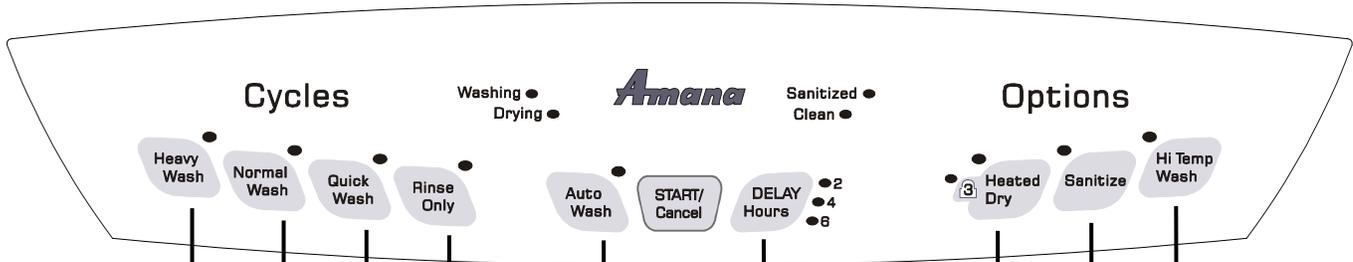
Always remove power to the unit before performing any resistance or continuity checks.

Control Definition



WARNING

To avoid risk of electrical shock, personal injury, or death, disconnect power to dishwasher before servicing.



Designed to provide a longer cycle for washing items with heavy food soils. Water usage is 8 gallons.

Designed to wash loads containing dishes with normal amounts of food soils. Water usage ranges from 3 to 6 gallons.

Designed for light food soils. The cycle ends with a rinse and does not include drying. Water usage is 4 gallons.

Rinses dishes being held until the dishwasher is full, and another cycle is selected. This cycle helps reduce the potential for developing odors. Water usage is 2 gallons.

Designed to auto select the number of fills and length of wash times based on soil level of dish load. Water usage ranges from 3 to 8 gallons.

Delays the start of the dishwasher based on user selection.

This option improves drying results by turning the heating element on and off during the dry portion of the cycle.

This option monitors cycles for sanitization.

This option raises Temperature in the Final rinse to 160° F

**Light Wash-
Insta Wash-
Auto Clean-**

Designed to wash loads containing dishes that are lightly soiled Water usage is 5 gallons.

Designed to wash loads containing dishes that are lightly soiled Water usage is 5 gallons.

Designed to auto select the number of fills and length of wash times based on soil level of dish load. Water usage ranges from 3 to 8 gallons.

Tough Scrub-

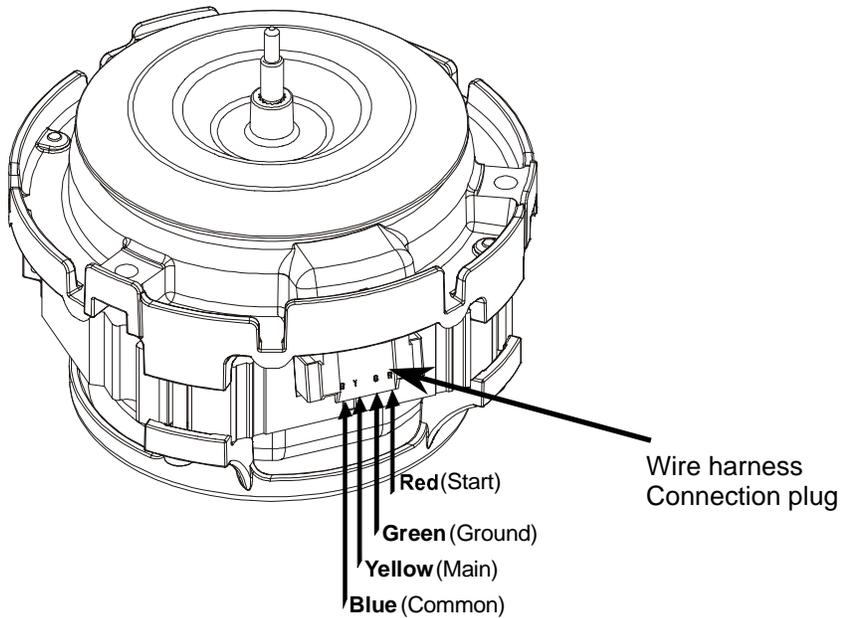

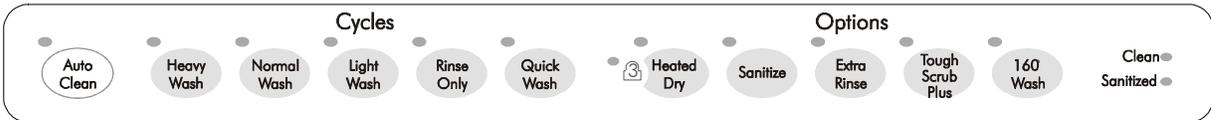
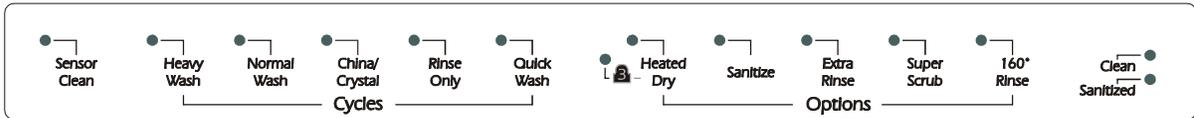
This option adds fills, heat and/or wash time to the wash cycle.

Control Definition/Motor Connectivity



WARNING

To avoid risk of electrical shock, personal injury, or death, disconnect power to dishwasher before servicing.




1/3HP
120V/60hz, 3.2 amps, 3250 RPM

Wiring Diagram



WARNING

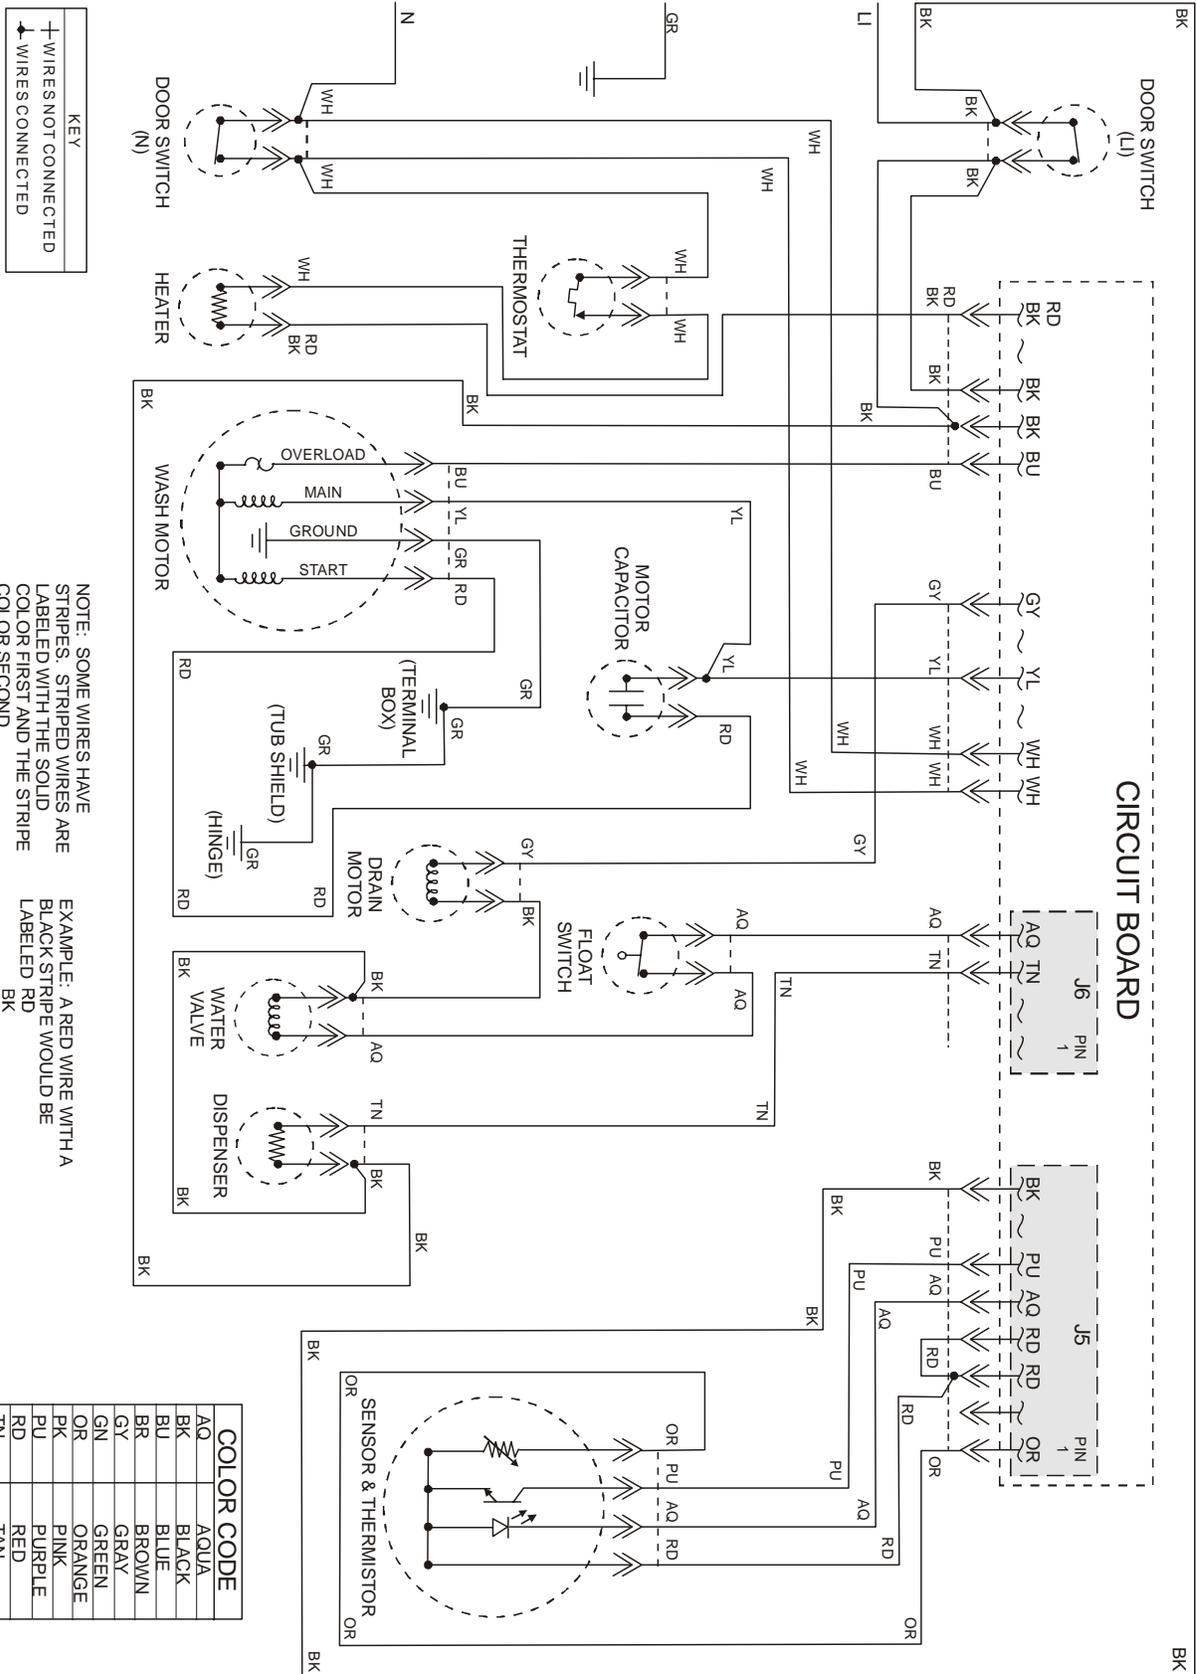To avoid risk of electrical shock, personal injury, or death, disconnect power to dishwasher before servicing.



KEY
 + WIRE NOT CONNECTED
 - WIRE CONNECTED

NOTE: SOME WIRES HAVE STRIPES. STRIPED WIRES ARE LABELED WITH THE SOLID COLOR FIRST AND THE STRIPE COLOR SECOND.

EXAMPLE: A RED WIRE WITH A BLACK STRIPE WOULD BE LABELED RD BK

COLOR CODE	
AO	AQUA
BK	BLACK
BU	BLUE
BR	BROWN
GY	GRAY
GN	GREEN
OR	ORANGE
PK	PINK
PU	PURPLE
RD	RED
TN	TAN
WH	WHITE
YL	YELLOW