

**DISCONNECT POWER CORD BEFORE SERVICING
IMPORTANT - RECONNECT ALL GROUNDING DEVICES**

All parts of this appliance capable of conducting electrical current are grounded. If grounding wires, screws, straps, clips, nuts or washers used to complete a path to ground are removed for service, they must be returned to their original position and properly fastened.

IMPORTANT SAFETY NOTICE

This information is intended for use by individuals possessing adequate backgrounds of electrical, electronic and mechanical experience. Any attempt to repair a major appliance may result in personal injury and property damage. The manufacturer or seller cannot be responsible for the interpretation of this information, nor can it assume any liability in connection with its use.

ELECTRICAL SPECIFICATIONS

Temperature Control (Position Mid) 33-16°F.
 Defrost Control 16 hrs. @ 35 min.
 Defrost Thermostat 55-28°F.
 Electrical Rating: 115V. AC 60 Hz. 11.6 Amp.
 Maximum Current Leakage 0.50 mA.
 Maximum Ground Path Resistance 0.14 Ohms
 Energy Consumption (AHAM) 119 KWH/mo.

NO LOAD PERFORMANCE

Control Position MID/MID and Ambient of:	70°F.	90°F.
Fresh Food, °F.	33-39	37-41
Frozen Food, °F.	1-7	0-4
Percent Running Time	37-47	64-80

REFRIGERATION SYSTEM


Refrigerant Charge (R-12) 6³/₈ ounces
 Compressor 1092 BTU/hr.
 Minimum Compressor Capacity
 Vacuum, 23 inches
 Minimum Equalized Pressure
 @ 70°F. 44 PSIG
 @ 90°F. 48 PSIG

INSTALLATION


Clearance must be provided for air circulation:

AT TOP 1-inch
 AT SIDES 5/8-inch
 AT REAR 1-inch

AIR FLOW

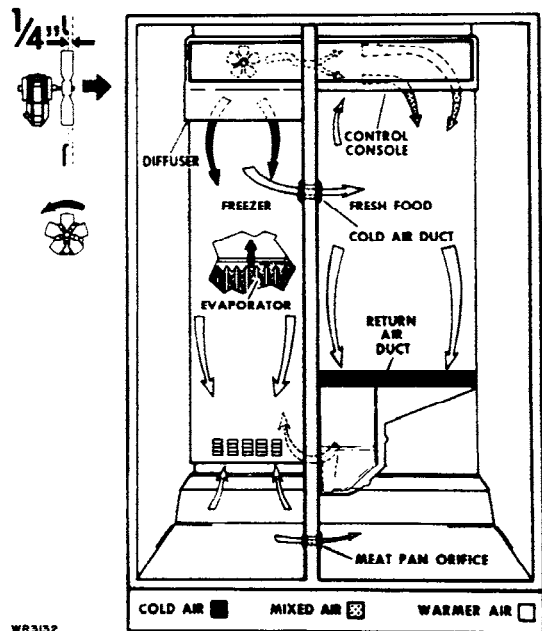

WR3132

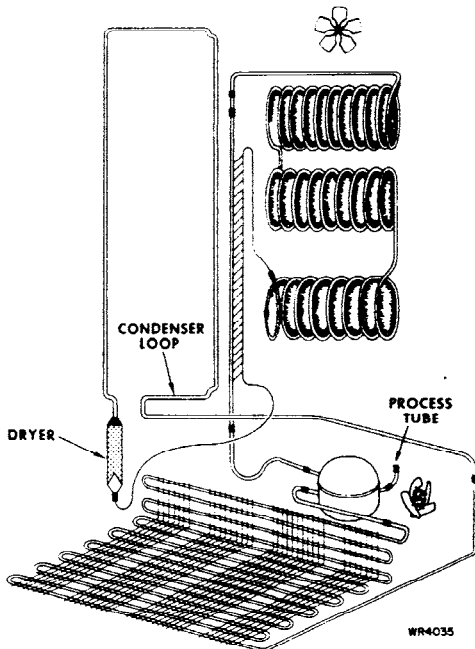

REPLACEMENT PARTS

Temperature Control	WR09X0442
Relay	WR07X0190
Overload	WR08X0094
Run Capacitor	WR62X0053
Defrost Control	WR09X0489
Defrost Thermostat	WR50X0117
Defrost Heaters (2)	WR51X0258
Condenser Fan Motor	WR60X0179
Evaporator Fan Motor	WR60X0194